



299-E26-59 (A6652) Log Data Report

Borehole Information:

Borehole:	299-E26-59 (A66	352)	Site:	216-A-24 Crib	
Coordinates (WA St Plane)		GWL ¹ (ft):	None	GWL Date:	09/20/05
North	East		Top of casing		
(m)	(m)	Drill Date	Elevation (ft)	Total Depth (ft)	Type
136367.076	575812.9006	07/83	649.67	30	Cable

Casing Information:

Cooling Tyme	Stickup (ft)	Outer Diameter (in.)	Inside Diameter (in.)	Thickness (in.)	Top (ft)	Bottom (ft)
Casing Type	Stickup (it)	(111.)	(111.)	(111.)	TOP (II)	Bottom (It)

Borehole Notes:

Casing diameter and casing stickup measurements were acquired by the logging engineer using a caliper and steel tape. Measurements were rounded to the nearest 1/16 in.

Logging Equipment Information:

Logging System: Gamma 1E			Type:	SGLS (70%) SN: 34TP40587A
Effective Calibration Date: 03/04/05 C		Calibration Reference:	DOE/EM-GJ854-2005	
		Logging Procedure:	MAC-HG	SLP 1.6.5, Rev. 0

Spectral Gamma Logging System (SGLS) Log Run Information:

Log Run	1	2 Repeat	
Date	09/20/05	09/20/05	
Logging Engineer	Spatz	Spatz	
Start Depth (ft)	30.0	12.0	
Finish Depth (ft)	5.0	7.0	
Count Time (sec)	100	100	
Live/Real	R	R	
Shield (Y/N)	N	N	
MSA Interval (ft)	1.0	1.0	
ft/min	N/A ²	N/A	
Pre-Verification	AE113CAB	AE113CAB	
Start File	AE113000	AE113025	
Finish File	AE113024	AE113030	
Post-Verification	AE113CAA	AE113CAA	
Depth Return Error	0	0	
(in.)			

Log Run	1	2 Repeat		
Comments	No fine gain	No fine gain		
	adjustment.	adjustment.		

Logging Operation Notes:

Logging was conducted with a centralizer on the sonde. Logging data acquisition is referenced to the top of casing. A repeat section was collected in this borehole to evaluate system performance.

Analysis Notes:

Pre-run and post-run verifications for the logging system were performed before and after the day's data acquisition. The acceptance criteria were met.

A casing correction for 0.25-in.-thick casing was applied to the log data.

SGLS spectra were processed in batch mode using APTEC SUPERVISOR to identify individual energy peaks and determine count rates. Concentrations were calculated with an EXCEL worksheet template identified as G1EMar05.xls using efficiency functions and corrections for casing, water, and dead time as determined from annual calibrations. No corrections for dead time or water were necessary.

Log Plot Notes:

Separate log plots are provided for the man-made radionuclide (¹³⁷Cs) detected in the borehole, naturally occurring radionuclides (⁴⁰K, ²³⁸U, ²³²Th [KUT]), a combination of man-made, KUT, total gamma, and dead time, and total gamma plotted with dead time. For each radionuclide, the energy value of the spectral peak used for quantification is indicated. Unless otherwise noted, all radionuclides are plotted in picocuries per gram (pCi/g). The open circles indicate the minimum detectable level (MDL) for each radionuclide. Error bars on each plot represent error associated with counting statistics only and do not include errors associated with the inverse efficiency function, dead time correction, casing corrections, or water corrections.

Results and Interpretations:


¹³⁷Cs was the man-made radionuclide detected in this borehole. ¹³⁷Cs was detected from the ground surface (approximately 5 ft because of casing stickup) to 26 ft. The maximum concentration was measured at approximately 4 pCi/g at 8 ft.

The repeat section indicates good agreement of the naturally occurring KUT and ¹³⁷Cs concentrations.


² N/A – not applicable


¹ GWL – groundwater level

299-E26-59 (A6652) Man-Made Radionuclides

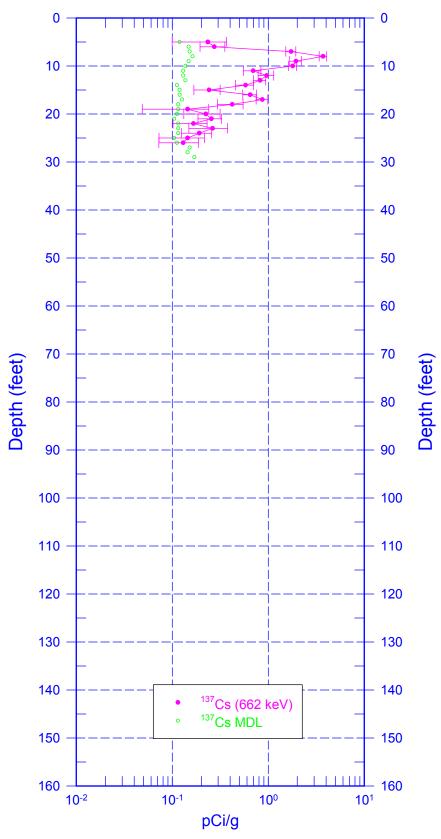


299-E26-59 (A6652) Natural Gamma Logs

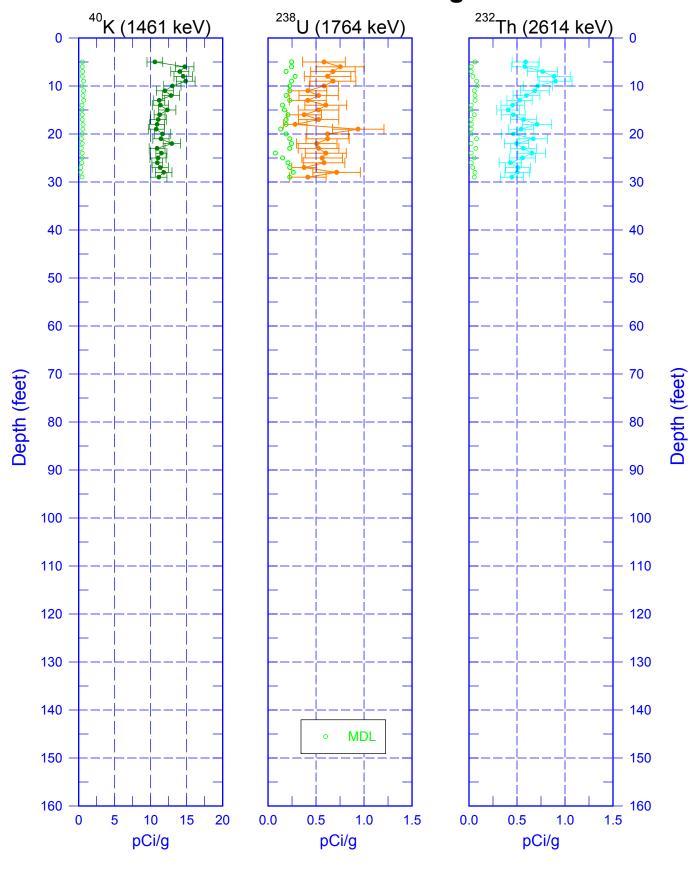


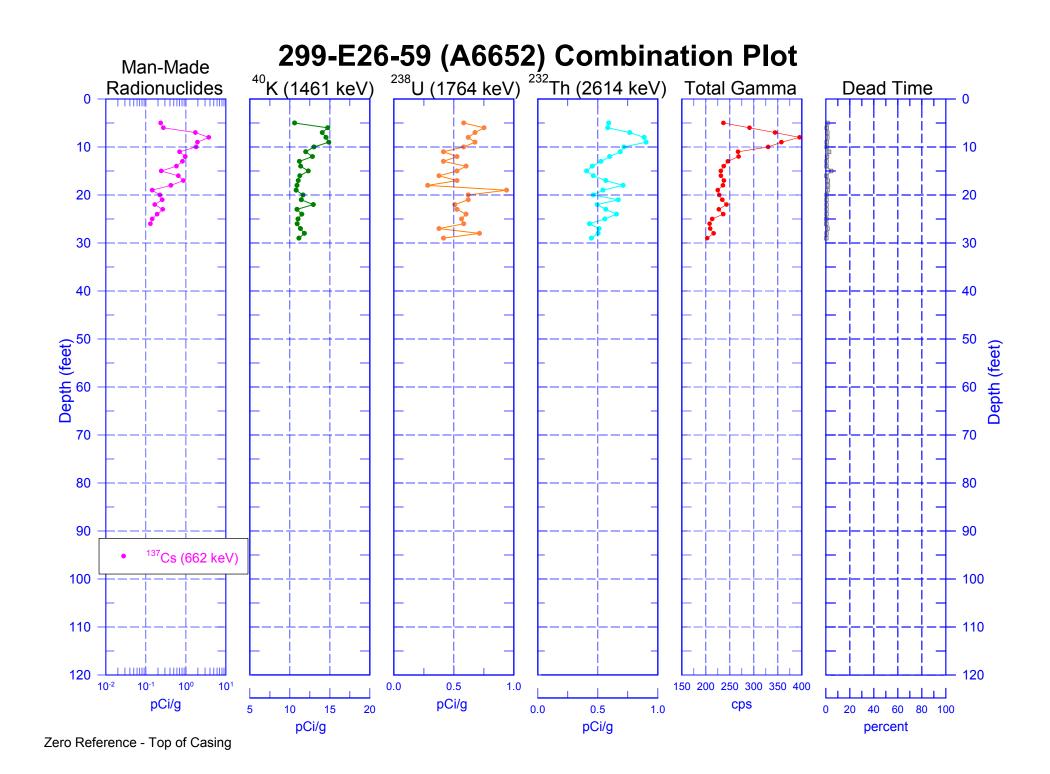


299-E26-59 (A6652) Total Gamma & Dead Time

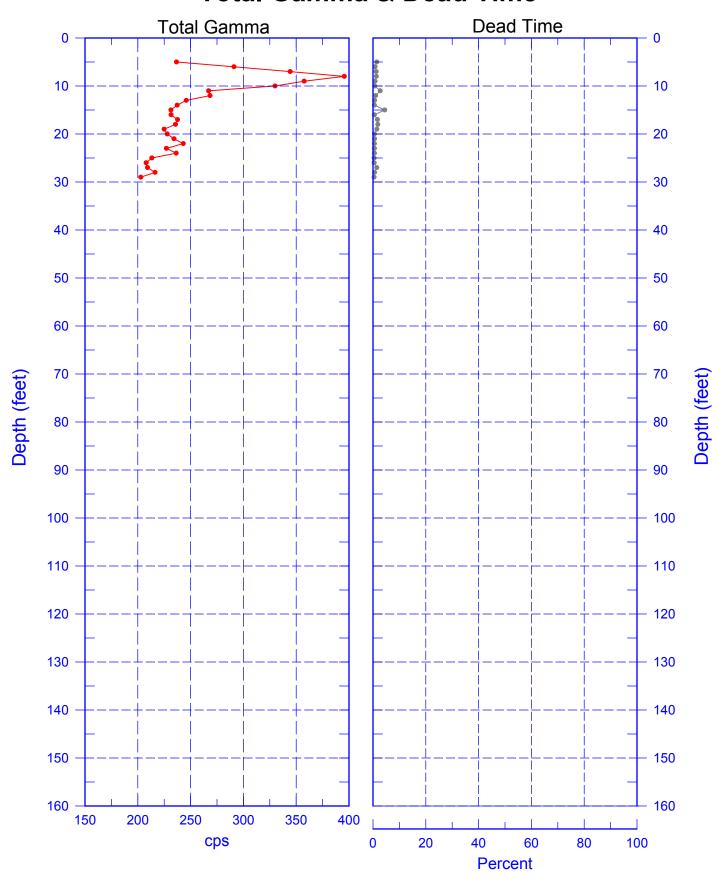

299-E26-59 (A6652) Repeat of Man-Made Radionuclides

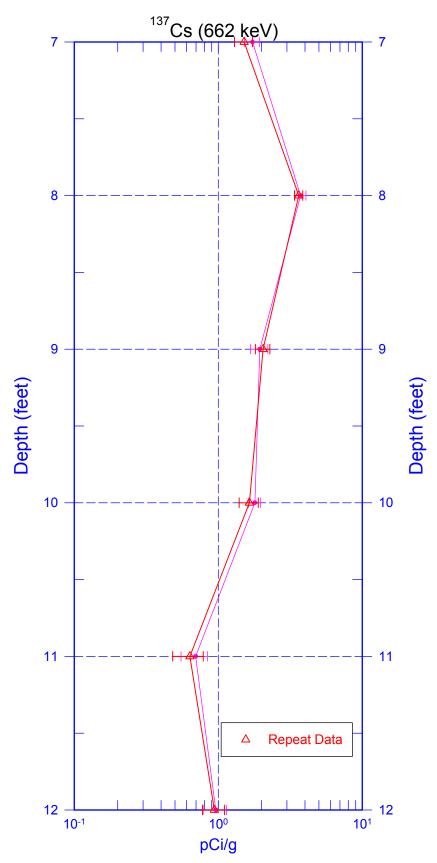

299-E26-59 (A6652) Repeat Section of Natural Gamma Logs

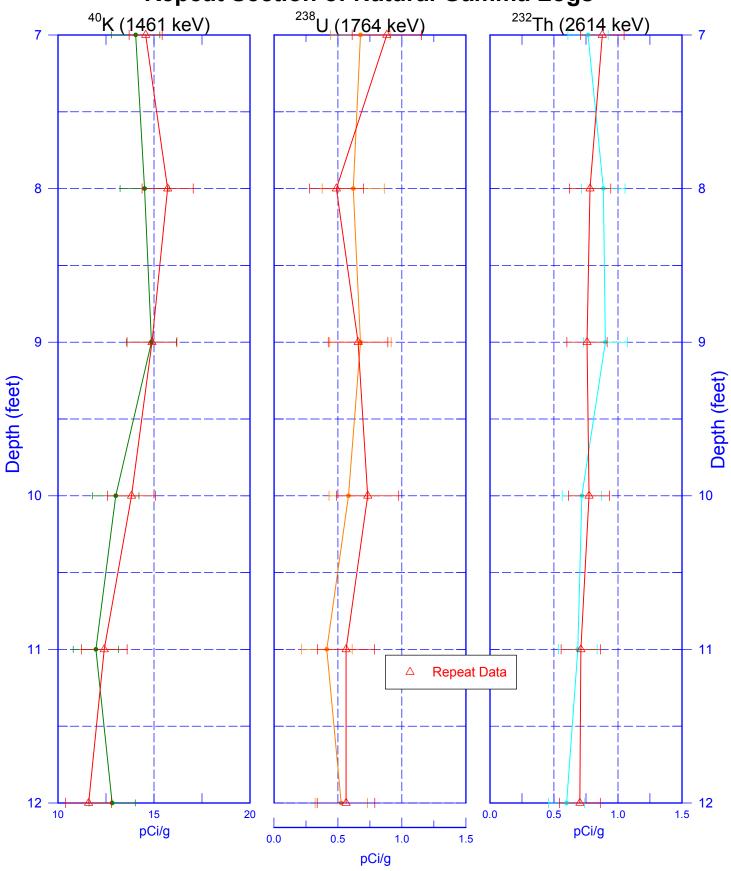

299-E26-59 (A6652) SGLS & RLS Comparison

